

+

# POWERGRIP

+

Analog


High Current



# YG-2


## POWER CONSOLE

Serial NO.:



220 - 240V 16A MAX

Chassis

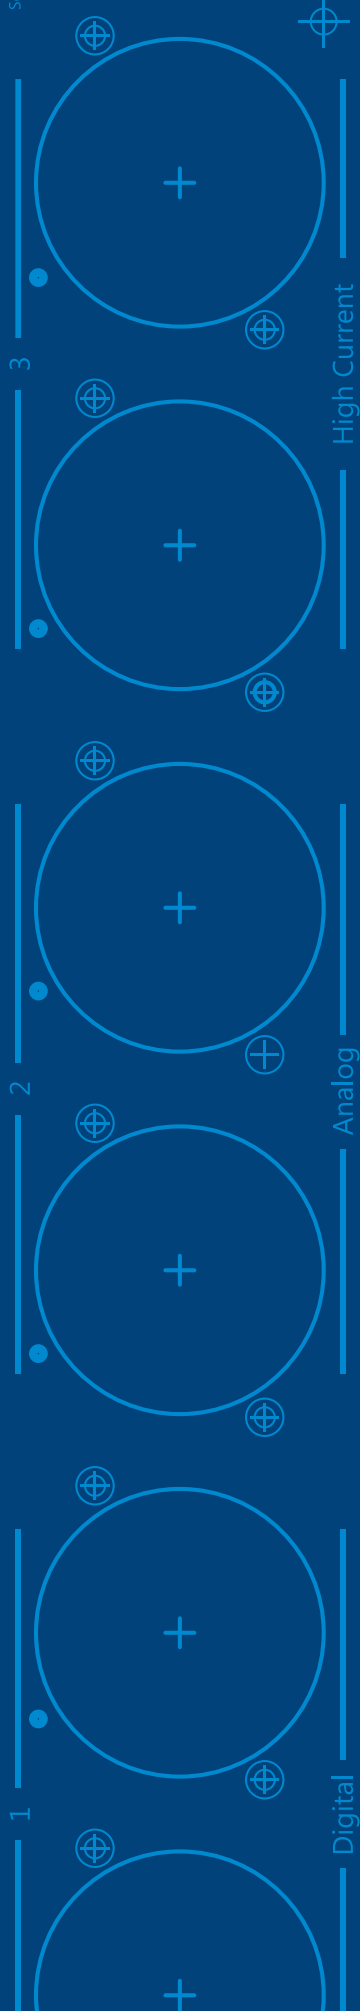

# SMALL in APPEARANCE, LARGE in PERFORMANCE

DESIGNED FOR INSTALLATION WHERE SPACE IS LIMITED

This small box has 6 power outlets with 3 individual filtering lines: for digital devices, for analog low current devices, and high current devices. There are no power limits, you can connect as much load as you need\*. YG-2 use same filters as its big brother YG-1, optimized for audio systems. Your power amplifiers will provide the same or even better performance as YG-2 is equipped with special outlets for two high current audio devices – 2 monoblocks are welcome.

With 3 level protection on board of YG-2, you will never get any harm from power line to your system. Outlets can be programmed for individual switch on and off with delays. Touch sensor allows easy control of display brightness and individual outlets control. RS232 interface is provided for use in smart home systems. 4 mm brushed aluminum front panel makes good combination with most HI-END devices.

\*Internal 16A fuse protects both wall outlet and power cord as they have current limit of 16A.



## TECHNICAL SPECIFICATIONS

Electrical Rating:	220 – 240 V, 16 A (AC) / 3680 W
Number of sockets:	6 Programmable Sockets (divided into 3 groups)
Extra protection:	coaxial lines (satellite, cable, antenna)
Joule Rating:	2200 J
Maximum Spike Current:	65000 A
Power Safety Shutdown:	$\leq 190 \pm 4 V / \geq 256 \pm 4 V$
19U rack brackets:	included in the box
Dimensions (W x H x D):	440 x 80 x 185 mm
Weight:	4.8 kg

**POWERGRIP**

[www.powergrip.com](http://www.powergrip.com)